

TMAR-VC SERIES

Electronic Multi-head Automatic Embroidery Machine

Large production model !



※TMAR-VC series are designed exclusively for cap and tubular application.


Features

Digitally Controlled Presser foot — Exquisite embroidery even on thick material



The DCP can reduce fabric fluttering that occurs during embroidery. It is specially effective when working thick fabric, very thin fabric, leather, and folds of material.

Example: Thick leather sewing and "fluttering"

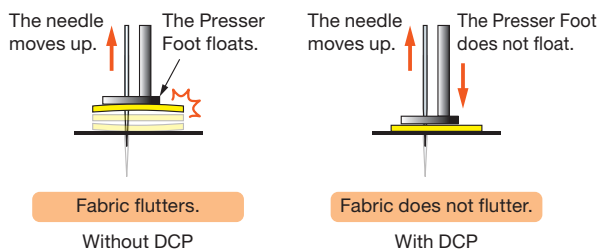

3D cap



*DCP stands for Digitally Controlled Presser foot.

Features

Major boost of cap embroidery turnout


The newly designed "Cap frame 2" has enhanced the embroidery stability whereby increasing the maximum rotational speed to 1000 rpm.
(900 rpm for +4mm).



Reinforced Wide Cap Frame

Direct Command Switch

All of the main functions of the operation panel can be manipulated from each head.

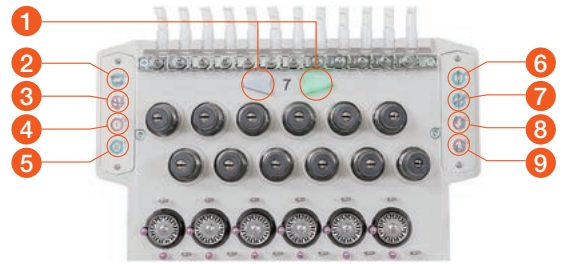


- ① Multi-color LED
- ② Frame back, forward ③ Auto Trim & Hold (ATH) ④ Custom Switch ① ⑤ Custom Switch ②
- ⑥ Head ON Switch ⑦ Head OFF Switch ⑧ Presser Foot UP ⑨ Presser Foot DOWN

* Common functions can be assigned on the custom switches #4 and #5.

Others



- Snap-Fit type Middle Thread Guide
 - Easy threading
 - Easy adjustment
 - Easy exchange

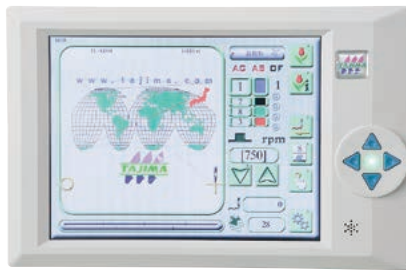

- Touch Screen Operation Panel



- Tubular Frame

Model	Needle	Head	Head Interval	Embroidery Space per Head Depth×Width (D×W _{mm}) : Inside Dimension			Machine Size			
				Normal mm (inch)	Wide Cap Frame mm (inch)	Semi-wide Cap Frame mm (inch)	Tubular Frame mm (inch)	Overall Width mm (inch)	Back mm (inch)	Overall Height mm (inch)
TMAR-V1212C	12	12	360	450×360 (17.7×14.1)	75×360 (2.9×14.1)	83×180 (3.2×7.0)	439×279 (17.2×10.9)	5,660 (222.9)	1,480 (58.3)	1,705 (67.2)
TMAR-V1512C	15	12	360	450×360 (17.7×14.1)			439×279 (17.2×10.9)	5,660 (222.9)	1,480 (58.3)	1,705 (67.2)

Factory Option Position Marker, Automatic Lubrication System

Option Beam Sensor, LED Light

Optional Frames Tubular Frame, Cap Frame 2

Speed Max. 1,100 rpm

Power 3-phase, 200~240V, 350 / 380 / 400 / 415 / 440V

Power Consumption Maximum 700W

※The practical embroidery space and the rotational speed vary depending on embroidery product, machine model, and operating conditions.
※No registered trademark or design of the products contained in this catalog may be used without prior permission.

Seller

Tajima Industries Ltd.

19-22, Shirakabe 3-chome, Higashi-ku Nagoya 461-0011 JAPAN
TEL. +81-52-932-3444, 3445 FAX. +81-52-932-2457, 3449



<http://www.tajima.com>



<https://www.facebook.com/TajimaGroup>

Manufacturer

Tokai Industrial Sewing Machine Co., Ltd.

Please contact with our distributor below.



* The specifications and designs of our products are subject to change without notice for performance improvement.